
# Find out what you’re signing.

A consumer in India uploads a rental agreement or a health insurance policy and gets back a marked-up copy of their own document: every one-sided clause flagged in the margin, explained in plain English, benchmarked against what is normal, with a concrete suggestion for what to ask for instead.

Built for the person who is about to sign something they don’t fully understand — a tenant, a policyholder — not for a lawyer. The job is to make them feel informed and equipped in under a minute.

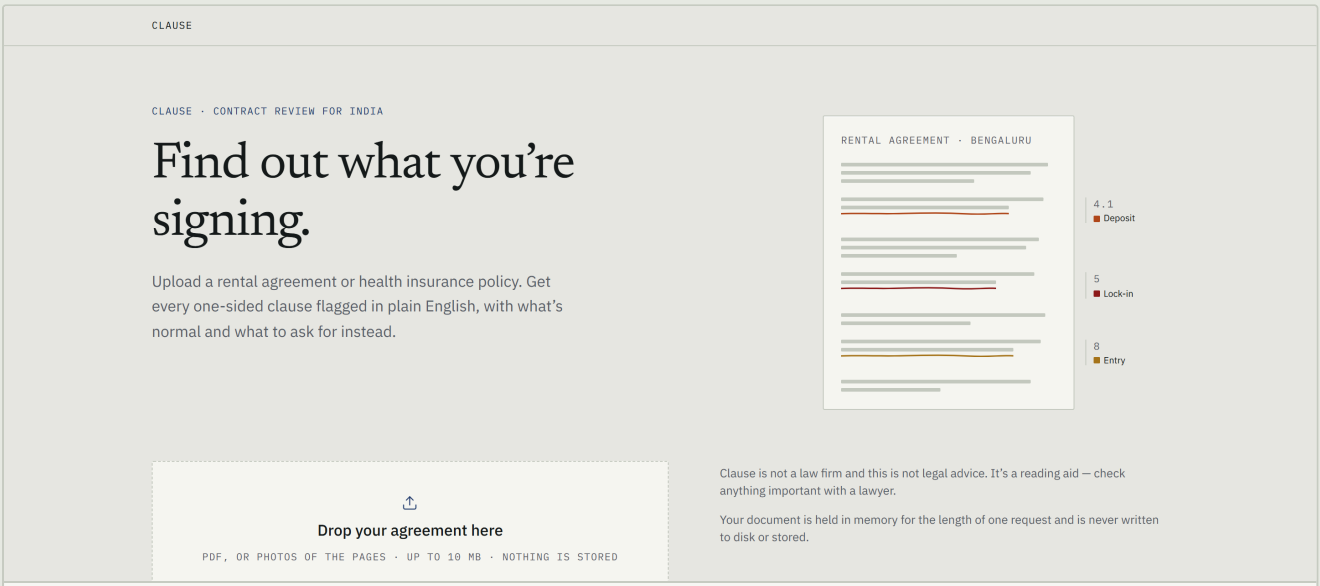


**The intake screen**
The thesis of the product is the marked-up document, so the first screen shows one.

# One upload, five stages, a document you can act on.

Everything happens in a single request and streams back as it is produced, so the reader watches their own agreement being marked up rather than staring at a spinner. On the bundled sample the finished report arrives in under fifteen seconds, with the clause text on screen and the first flags landing several seconds before that.

01
**Read**
PDF text layer, or vision OCR for photographed pages. A scan with no text layer is detected and the user is told what to do instead.

02
**Split**
Segmented into clauses, keeping the printed number — “4.2” — because that is how the reader finds the clause in their own copy.

03
**Match**
Each clause is compared against a knowledge base of 34 risk patterns drawn from Indian rental and insurance practice.

04
**Review**
Clauses are reviewed in parallel batches, each seeing only the patterns relevant to it. Fair clauses are left unflagged.

05
**Compile**
A reproducible risk score, a verdict in plain words, and a two-sentence summary that leads with the worst thing.

## What the reader gets for every flagged clause

### WHAT IT MEANS

The clause restated in their terms, with the figures from their own document.

### WHY IT MATTERS

The concrete consequence — in rupees, in months, or in the right they give up.

### WHAT’S NORMAL

The market or regulatory benchmark in India, so they can tell unusual from routine.

### WHAT TO ASK FOR

A specific, sayable request — phrased as something they could put in a message.

### TWO RULES THE PRODUCT WILL NOT BREAK

**A quote is never invented.** Every quoted span is verified character-for-character against the clause it came from. If it cannot be located in the document, no quote is shown.

**A fair clause gets no flag.** An unflagged clause is a signal, not a gap — and when nothing is flagged, the report says so in words.

## Usable by everyone who needs it

### ON A PHONE

Laid out down to 380px wide with no sideways scrolling — the margin collapses and each finding moves under its clause.

### BY KEYBOARD ALONE


The whole flow, from choosing a document to opening a finding, works without a mouse and with a visible focus ring throughout.

### WITHOUT THE MOTION

If the reader's device asks for reduced motion, the sweep and the fly-in are dropped and the final state is shown at once.


### ON PAPER

Printing gives a single-column copy with every finding expanded under its clause, so it can be read and marked up away from a screen.

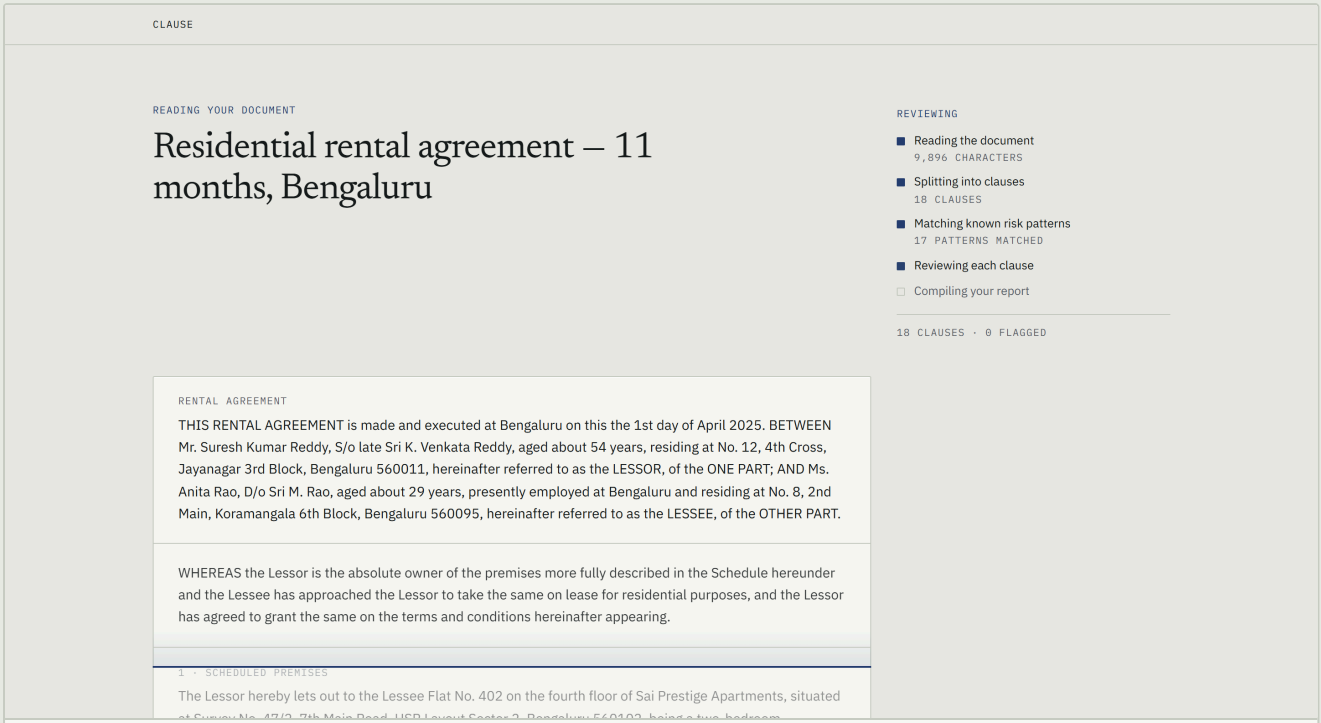



**Mid-review — the document is already on screen**

The real extracted clause text appears as soon as it is available. A line sweeps the column; text it has passed sits at full strength, text ahead of it stays dimmed. The five stages report live in the margin with real counts, not a progress bar.

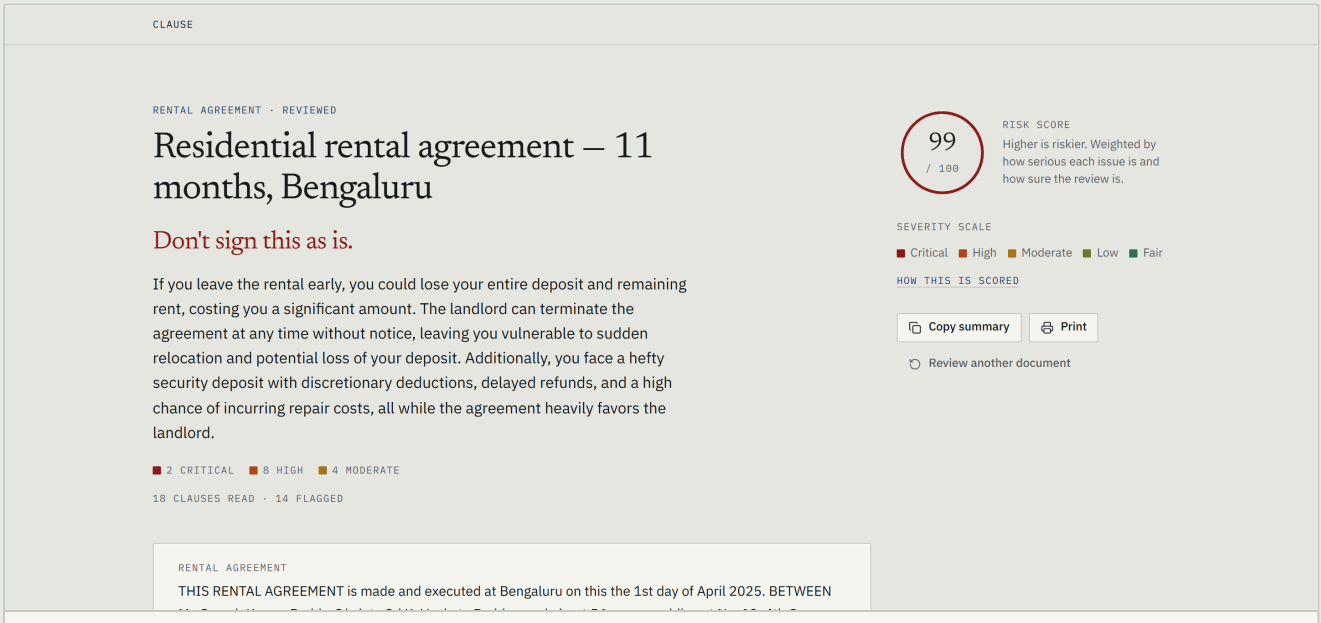


**The verdict**

The inferred title, a verdict as a plain sentence, the summary leading with the single worst thing, the severity counts, and a score whose method is explained behind “How this is scored”. Live output on the bundled sample agreement.

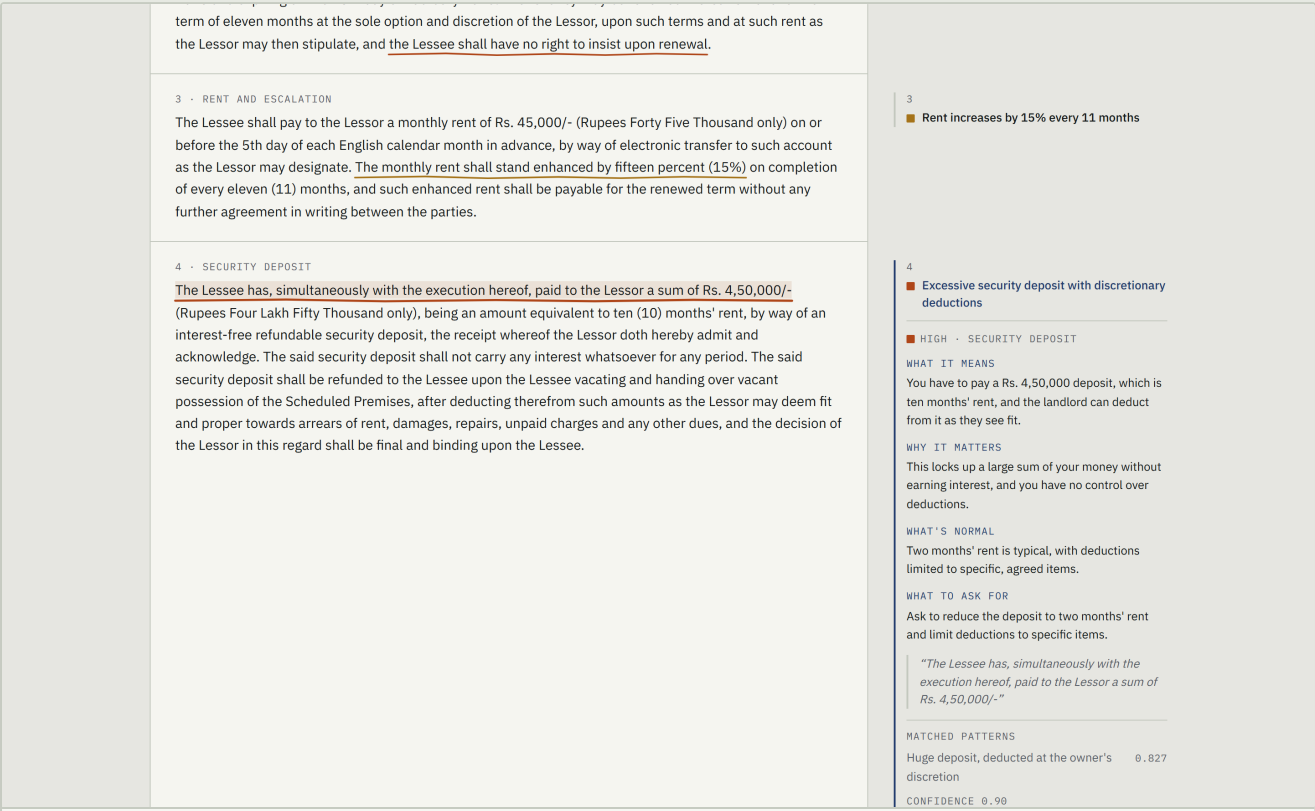


**A finding, opened**

The clause text is the user's own. The underline marks the exact words the finding rests on, drawn by hand in the severity colour. Everything the review relied on is shown, including the matched pattern with its real similarity score and the review's own confidence — so the reader can weigh it rather than take it on trust.

## Severity, and what it costs

Five levels, one colour language across the margin, the counts and the score. Colour is spent on the annotations and nowhere else.


| | |
|---|---|
| Critical | A large sum, the home, or the cover itself |
| High | Seriously one-sided, real money or rights |
| Moderate | A genuine but bounded cost |
| Low | Minor; useful to know before signing |
| Fair | Context, not a risk |

## Take it off the screen


The report is meant to be used in a conversation with a landlord, a broker or an insurer — so it leaves the page in two ways.

- **Copy summary** produces worst-first plain text, ready to paste into WhatsApp or email, with the points to raise and the exact wording to quote.
- **Print** gives a single-column paper copy with every finding expanded underneath its clause, the underlines kept, black on white.


The disclaimer travels with both, because they get read away from the app.

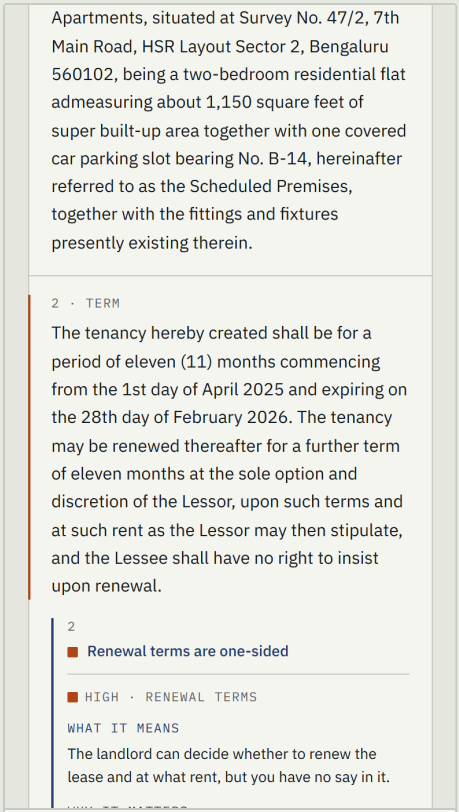


**On a phone**
The margin collapses and each finding sits directly under its clause.

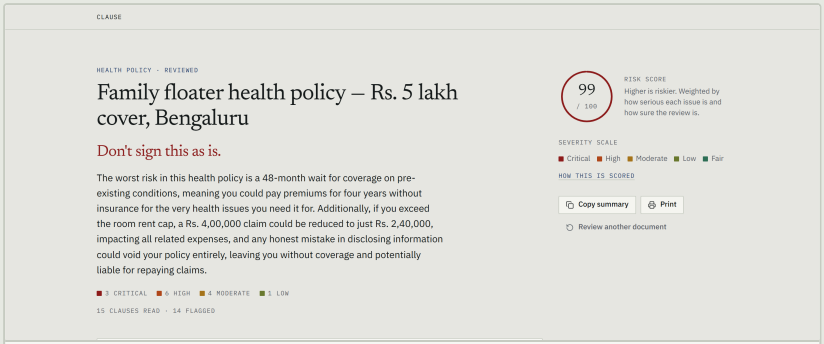


**A health insurance policy**
The second document type, with its own 17 patterns — waiting periods, room-rent caps, co-payment, claim deadlines, non-disclosure.

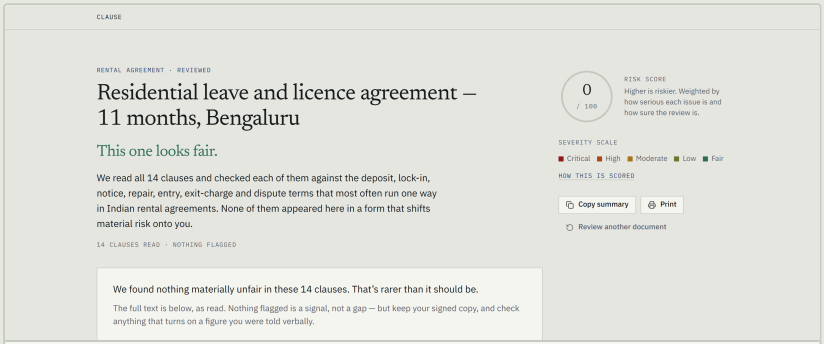


**A fair agreement**
Given a balanced document it flags nothing, scores zero and says so plainly. It does not invent problems in order to look useful.

## The knowledge base

34 risk patterns, written for Indian consumer reality rather than translated from elsewhere — rupee amounts, Indian regulatory vocabulary, and the things that actually go wrong. Each carries what the unfair version looks like, why it hurts, and what counts as normal here.

### 17 RENTAL PATTERNS

Deposit size and deduction discretion, refund timing, lock-in with forfeiture, notice asymmetry, escalation, repairs pushed to the tenant, entry without notice, personal restrictions, exit painting charges, brokerage and stamp duty, subletting, termination for convenience, late-rent penalties, dispute venue and arbitration cost, utilities and society charges, “as is” condition, unilateral amendment.

### 17 HEALTH-INSURANCE PATTERNS

Pre-existing and specific waiting periods, room-rent and ICU caps, proportionate deduction, age-linked co-payment, disease sub-limits, non-medical exclusions, claim intimation deadlines, network and cashless limits, pre- and post-hospitalisation windows, free-look period, non-disclosure repudiation and moratorium, no-claim bonus reset, renewal and premium revision, day-care and domiciliary cover, restoration limits, breadth of exclusions.

## Measured, not asserted

Every figure below was produced by running documents through the deployed pipeline. They describe the current build on the documents named — not a claim about all agreements.

| DOCUMENT | CLAUSES | FLAGGED | CRITICAL | VERDICT |
|---|---|---|---|---|
| Rental agreement, Bengaluru (sample) | 18 | 14 | 2 | Don’t sign as is |
| Family floater health policy (sample) | 15 | 14 | 3 | Don’t sign as is |
| Photographed page, via OCR | 7 | 5 | 1 | Don’t sign as is |
| Balanced agreement (fair control) | 14 | 0 | 0 | This one looks fair |

- In all four runs, **every quote was verbatim** and every finding resolved to a real clause in the document.
- Clause-to-pattern matching was checked against eleven hand-written probe clauses, deliberately worded unlike the knowledge base: the intended pattern ranked first in **10 of 10** scoreable cases.
- On real documents, genuine clauses match their pattern at 0.63–0.89 similarity while recitals and title blocks peak at 0.54 — the gap the matching threshold was tuned on.
- If some clauses cannot be reviewed, the report says so in its own summary rather than quietly leaving them out — and if none of them can be reviewed, it says that too, instead of reporting a document as clean.

## Deliberately out of scope

- No accounts, no sign-in, no history. Every review is anonymous.
- No storage of any kind. A document lives in memory for one request and is never written to disk — there is nothing to leak.
- No payments or metering.
- One request per document, with a 60-second ceiling. Very long documents are capped, and the report says when it truncated.
- Two document types. English only.

## The obvious next steps

- Multi-page photo upload — the highest-value addition for a phone-first audience.
- More document types on the same machinery: employment, personal and gold loans, builder-buyer agreements.
- A shareable read-only report link, so a tenant can send the marked-up copy to the other side.
- An evaluation set of real labelled documents, to put precision and recall numbers next to the ones above.

**Clause is not a law firm and this is not legal advice.** It is a reading aid. Findings describe risks and market norms, never rulings, and the disclaimer appears on every screen including the printed report. Anything important should be checked with a lawyer.

A note on the live link: it is currently serving the two bundled example documents rather than calling the model, which the interface marks with a **Demo data** chip in the corner. That path exists so the product can be demonstrated reliably and at no cost; the screenshots in this document are genuine model output, captured with analysis switched on. Adding an API key turns live analysis on and the chip off.